



EN 50131-2-6 Grade 3 and
VdS Class C certified

PROVEN TECHNOLOGY FOR HIGH SECURITY REQUIREMENTS – THE NEW 100 01 51 A/A G3 FROM LINK

Anyone looking to protect windows, doors, bank machines, safes or other protective objects with high security requirements against manipulation would be well advised to consider the new 100 01 51 A/A G3 surface mount magnetic contact from LINK. The opening detector is based on tried and tested technology and high security standards.

It is ideal for securing commercial properties with moderate to high risk potential, as testified by the certifications to VdS Class C and now also to EN 50131-2-6 Grade 3.




FUTURE PROOF

The inner workings of the surface mount magnetic contact have been modified in such a way that it meets the latest technical standards, in particular, and thus also fully meets future requirements.

Rounded edges on the housing also give the magnetic contact a more elegant look.

FLEXIBLE TO MOUNT

The housing dimensions and drill holes are exactly the same as those of the previous product, which means that any pre-drilled holes – for example in safes – can still be used. The popular cross holes make the surface mount magnetic contact extremely flexible and easy to mount. Everything that you need is included with the product: suitable screws including cover caps and washers for mounting on ferromagnetic materials such as steel. This prevents the metal from influencing the magnetic contact. The washers can also be used for levelling.

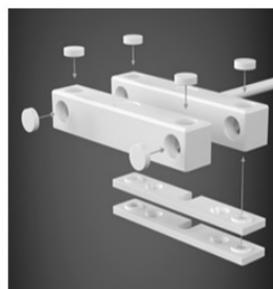


TWO VERSIONS

The new surface mount magnetic contact is available in two versions – one with a long and one with a shorter switching distance to cover all main usage requirements.

The 100 01 51 A/A G3 G is designed for a long switching distance of 23 mm (+/- 3 mm) and the minimum mounting distance between the two elements is 10 mm (+/- 3 mm). The switching distance of the 100 01 51 A/A G3 K version is 14 mm (+/- 3 mm); both elements can be mounted with virtually no gap (minimum mounting distance 1 mm, +/- 1 mm).

The new surface mount magnetic contact 100 01 51 A/A G3 with the VdS Class C and EN 50131-2-6 Grade 3 certifications is currently undergoing testing and certification and is expected to be delivered in certified form mid-year.

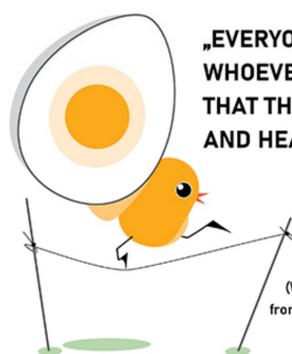

„EVERYONE KNOWS,
WHOEVER THEY MAY BE –
THAT THE EGG IS INVIGORATING
AND HEALTHY.“

(Wilhelm Busch 1832-1908,
from „The Particularists“)

IN THIS SPIRIT WE WISH YOU A HAPPY EASTER

...and that, with the necessary strength and balance, all your future endeavours will be roaring successes!

:: Best wishes from your Link Team ::



Components for Building
Automation and Security



Certifications according to
European standardizations



Development and
production
in line with OEM/ODM
requirements



Proven quality

[Website](#)

[About us](#)

[Email](#)

[Our services](#)

[Imprint](#)

[Our products](#)

© 2023, LINK GmbH

[unsubscribe](#)

LINK GmbH

Bahnhofsallee 59-61 // 35510 Butzbach, Germany

TEL: + 49 (0)6033 97404-0 // FAX: + 49 (0)6033 97404-20
MAIL: info@link-gmbh.com

Managing director: Daniel Link, Markus Link
Court: Friedberg - HRB 2527 // VAT Id.-No.: DE112605169