




Für OEM-Distribution For OEM-Distribution

LV 20 DA D

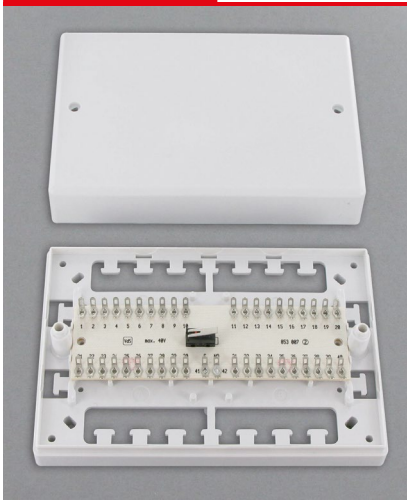

Technische Daten Specifications

Platine PCB	42 Doppel-Löt-Anschlüsse 42 double soldering terminals
Deckelkontakt Tamper switch	Schließer single-pole NO contact
Gehäuse Housing	LD 20 Leerdose aP LD 20 empty box for surface mounting
Maße Gehäuse Housing dimensions	150 x 100 x 36 mm
Kunststoffmaterial Material	S-B oder A-B-S S-B or A-B-S
Schutzart Protection category	VdS-Umweltklasse II VdS-Environmental Class II
Zulassungen Approvals	G 187 003, VdS-Klasse C G 187 003, VdS-Class C

LV 20-2 DA D



Technische Daten Specifications

Platine 1 PCB 1	P LV 10 DA, 22 Doppel-Löt-Anschlüsse P LV 10 DA, 22 double soldering terminals
Platine 2 PCB 2	P LV 10 DA D, 22 Doppel-Löt-Anschlüsse P LV 10 DA D, 22 double soldering terminals
Deckelkontakt Tamper switch	Schließer single-pole NO contact
Gehäuse Housing	LD 20 Leerdose aP LD 20 empty box for surface mounting
Maße Gehäuse Housing dimensions	150 x 100 x 36 mm
Kunststoffmaterial Material	S-B oder A-B-S S-B or A-B-S
Schutzart Protection category	VdS-Umweltklasse II VdS-Environmental Class II
Zulassungen Approvals	G 187 003, VdS-Klasse C G 187 003, VdS-Class C