




Für OEM-Distribution For OEM-Distribution

MP RV 10-4

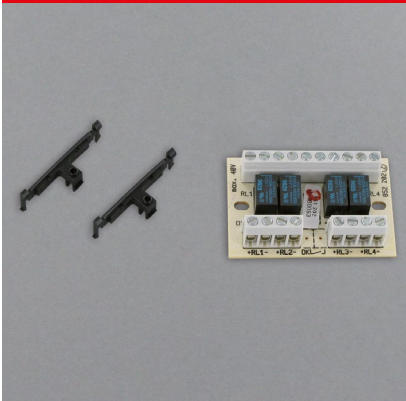

Technische Daten Specifications

Beschreibung	Relais-Verteiler-Platine für den Einbau in Metallverteiler aP. <ul style="list-style-type: none">• 2 Relais monostabil, Umschaltkontakt• 2 Relais monostabil, Schließkontakt
Description	Löschdioden parallel zu den Relaisspulen Relay-junction PCB for mounting in metal terminal boxes, surface mounting. <ul style="list-style-type: none">• 2 Relays monostable, change-over contact• 2 Relais monostable, NO switch Protecting diode parallel to the relay coils
Anschlüsse Terminals	Schraubklemmen Screw terminals
Erregerseite	Nennspannung 9-35 V DC bei 20 °C Widerstand 2250 ± 225 Ω bei 20 °C
Exciter side	Power input 9 - 35 V DC at 20 °C Resistor 2250 ± 225 Ω at 20 °C
Kontaktseite	Schaltspannung max. 40 V DC / 40 V AC Schaltstrom max. 1 A Schaltleistung max. 30 W oder 60 VA
Contact side	Switching voltage max. 40 V DC / 40 V AC Switching current max. 1 A Contact capacity max. 30 W, or 60 VA
Ansprechzeit Activation time	ca. 1 ms app. 1 ms
Maße Dimensions	60 x 42 mm
Montagematerial	2 Kunststoff-Platinenaufnahmen (POM) 2 Plastite-Schrauben 3 x 10 mm für Platinenbefestigung 2 Abstandshalter für Platinenunterstützung
Mounting parts	2 plastic PCB-holders (POM) 2 plastite-screws 3 x 10 mm for PCB fastening 2 spacers for PCB support