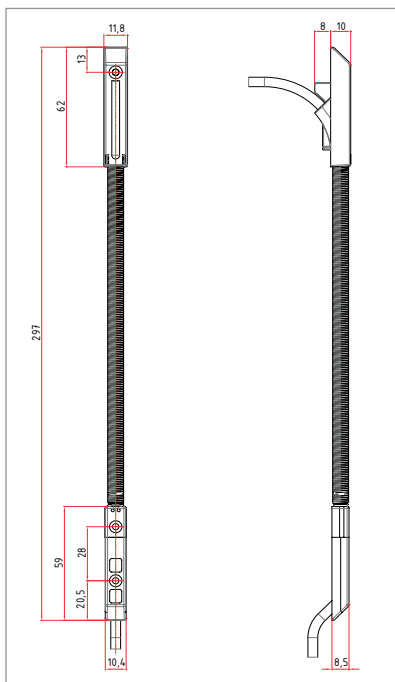


DEUTSCH

M 13 35

Einsatzbereich: Verdeckter, diagonaler Einbau in Fenster- oder Türprofil

Mechanische Daten

Spiralfeder	Edelstahl
Länge	297 mm
Außendurchmesser	7,5 mm
Öffnungswinkel	Max. 180°

Elektrische Daten

Leitung	LiF9Y11Y 6-polige Ausführung 4,9 mm, grau
Adernaufbau	6 x 0,34 mm ²
Außendurchmesser	4,9 ± 0,15 mm
Leiterwiderstand	Max. 57 Ohm/km
Besonderheiten	Blei-, Cadmium-, FCKW- und Halogenfrei
Schutzart	IP 67 (im gesteckten Zustand)
Strom	Max. 3,0 A
Spannung	Max. 48 V DC
Steckverbindung	6-polig

Thermische Daten

Temperatur im ruhenden Zustand	-25°C bis +70°C
Temperatur im bewegten Zustand	-5°C bis +50°C

Befestigungsmaterial


Senk-Blebschrauben	DIN 7982 (2,9 x 19 mm)
---------------------------	------------------------

Montagezubehör

	Optional
M 17 10	Edelstahl-Abdeckblech für den Einbau in Holz
Maße (B x H x T)	16 x 126 x 3 mm
M 17 11	Edelstahl-Abdeckblech für den Einbau in Kunststoff und Aluminium
Maße (B x H x T)	16 x 126 x 3 mm

ENGLISH

M 13 35

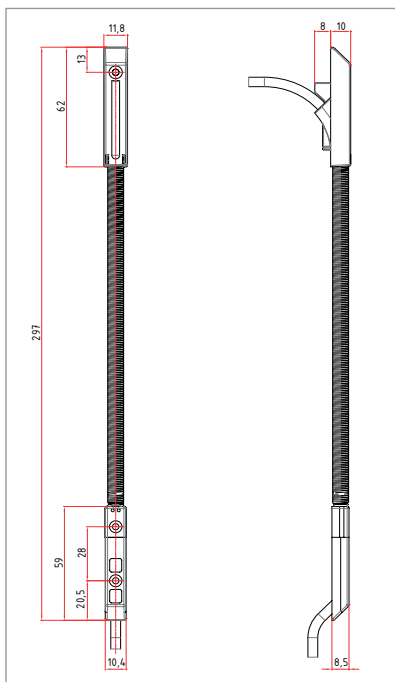

Applications: Concealed, diagonal installation in window or door profile

Mechanical Data

Spring	DD13 (1.0335)
Length	24 x 338 x 17.5 mm
Inner diameter	10 mm
External diameter	13.2 mm
Angle of spread	Max. 180°

Electrical Data

Cable	LiF9Y11Y 6 pole variant 4.9 mm, grey
Wire construction	6 x 0.34 mm ²
External diameter	4.9 ± 0,15 mm
Conductor resistance	Max. 57 Ohm/km
Special features	Free of lead, cadmium, CFC and halogen
Protection class	IP 67 (when plugged)
Electricity	Max. 3,0 A
Voltage	Max. 48 V DC
Connector	6 pole

Thermal Data

Temperature (fixed installation)	-25°C up to +70°C
Temperature (fixed installation)	-5°C up to +50°C

Fastening Material

Countersunk	DIN 7982 (2,9 x 19 mm)
--------------------	------------------------

Mounting Accessories

Optional

M 17 10	Stainless steel sheet for mounting in wood
Dimensions (w x h x d)	16 x 126 x 3 mm
M 17 11	Stainless steel sheet for mounting in plastic and aluminum
Dimensions (w x h x d)	16 x 126 x 3 mm