



Für OEM-Distribution For OEM-Distribution

**LV 10 DA D**

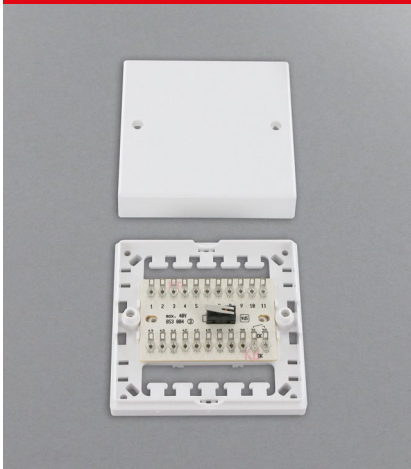


Technische Daten Specifications	
<b>Platine PCB</b>	P LV 10 DA D, 22 Doppel-Löt-Anschlüsse P LV 10 DA D, 22 double soldering terminals
<b>Deckelkontakt Tamper switch</b>	Schließer single-pole NO contact
<b>Gehäuse Housing</b>	LD 10 Leerdose aP LD 10 empty box for surface mounting
<b>Maße Gehäuse Housing dimensions</b>	85 x 85 x 26 mm
<b>Kunststoffmaterial Material</b>	S-B oder A-B-S S-B or A-B-S
<b>Schutzart Protection category</b>	VdS-Umweltklasse II VdS-Environmental Class II
<b>Zulassungen Approvals</b>	G 187 002, VdS-Klasse C G 187 002, VdS-Class C

**LV 15 DA D**

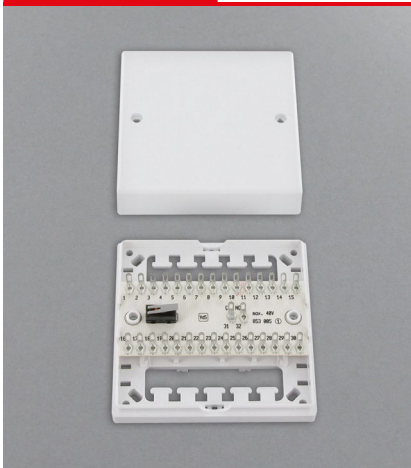

Technische Daten Specifications	
<b>Platine PCB</b>	32 Doppel-Löt-Anschlüsse 32 double soldering terminals
<b>Deckelkontakt Tamper switch</b>	Schließer single-pole NO contact
<b>Gehäuse Housing</b>	LD 10 Leerdose aP LD 10 empty box for surface mounting
<b>Maße Gehäuse Housing dimensions</b>	85 x 85 x 26 mm
<b>Kunststoffmaterial Material</b>	S-B oder A-B-S S-B or A-B-S
<b>Schutzart Protection category</b>	VdS-Umweltklasse II VdS-Environmental Class II
<b>Zulassungen Approvals</b>	G 187 055, VdS-Klasse C G 187 055, VdS-Class C

**LV 15 DA D-S**

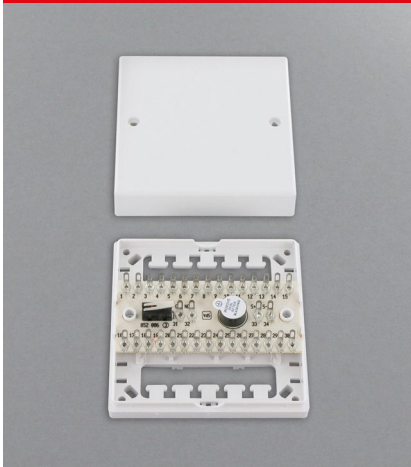

Technische Daten Specifications	
<b>Beschreibung Description</b>	Löt-Verteiler aP mit Summer Soldering terminal box, surface mount with buzzer
<b>Platine PCB</b>	34 Doppel-Löt-Anschlüsse 34 double soldering terminals
<b>Deckelkontakt Tamper switch</b>	Schließer single-pole NO contact
<b>Summer Buzzer</b>	<b>Betriebsspannung:</b> 9 - 15 V DC <b>Power input:</b> <b>Arbeitsstrom ausgelöst:</b> ca. 30 mA bei 12 V app. 30 mA at 12 V <b>Operating current triggered:</b> <b>Frequenz:</b> 2300 ± 500 Hz bei 12 V 2300 ± 500 Hz at 12 V <b>Lautstärke:</b> ca. 83 dB / 10 cm bei 12 V app. 83 dB / 10 cm at 12 V <b>Loudness:</b>
<b>Gehäuse Housing</b>	LD 10 Leerdose aP LD 10 empty box for surface mounting
<b>Maße Gehäuse Housing dimensions</b>	85 x 85 x 26 mm
<b>Kunststoffmaterial Material</b>	S-B oder A-B-S S-B or A-B-S
<b>Schutzart Protection category</b>	VdS-Umweltklasse II VdS-Environmental Class II
<b>Zulassungen Approvals</b>	G 187 055, VdS-Klasse C G 187 055, VdS-Class C